

Installation Instructions

PRODUCTS WITH NO JOINTS - WITH OR WITHOUT RELIEF

FOLLOW THE INSTRUCTIONS BELLOW TO HAVE THE BETTER RESULT FOR YOUR ENVIROMENT

- Recommended only for walls;
- Do not curve;
- Should not be grout;
- It is not recommended for opened external areas, except products of dark and rustic finish;
- It is not recommended for areas in contact with water, as box of bathrooms, kitchens and swimming pools.

BEFORE INSTALLING

- Verify that the product complies with the specifications listed for the project;
- Make a panel with several pieces of different boxes in order to compare the tone of the product. Many of the raw materials are from nature and are subject to shade variations.

DEFINITION AND INSTALLATION OF MORTAR

For the raw material does not change color and texture, follow the instructions bellow:

- **Light-colored products** use white mortar;
- **Dark-colored products** use black mortar or mortar with the same shade of the product.

Its not necessary to use a special mortar for natural stones. A mortar for porcelain tiles is the best opption.

INSTALLING THE PRODUCT

- Let the mortar stand for 5 to 10 minutes before **installing** the product;
- Compensate the differences of thickness between mosaic and tile, avoiding the excess of mortar to the piece does not work;

- Position the piece on the mortar with the screen side down;
- Always start the application from the most visible part of the project. On walls, start the application from the bottom to the top;
- Use clean tools to not scratch the product;
- Try to reduce the joints between the pieces for an uniform panel. If it aint possible, remove some of the extremity pieces that are difficult to fit and reposition them (images 1 and 2);

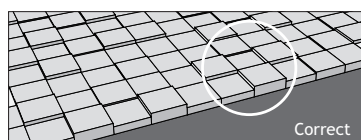


Image 1

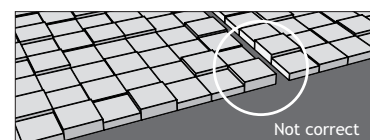


Image 2

- Remove the excess of mortar in the joints and between the pieces immediately after the installation.

AFTER INSTALLING

- Use only water and mild soap for cleaning the mosaic;
- Do not apply bleach, solvent, chloroform, ammonia, water-frogs, remover, alcohol, detergent or any type of acid;
- It is recommend the application of the impermeable HRA after the application to highlight the color of the antic finished marbles. Do not use this product in white marbles as Bianco Carrara and Bianco Thassos.

Remember:

IT IS IMPORTANT TO HIRE A SPECIALIZED PROFESSIONAL TO APPLY THE PRODUCT.

RETURNS WILL BE ACCEPTED ONLY BEFORE THE PRODUCT HAS BEEN APPLIED.