
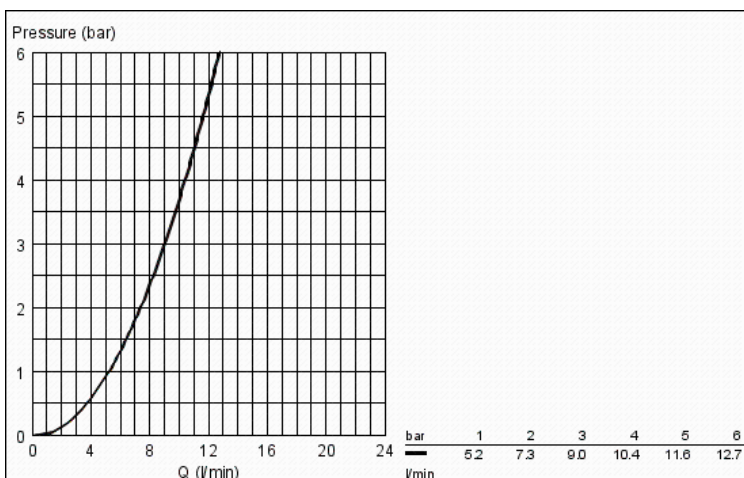


Rapid SL for WC

MODEL # 38528

Pure Freude
an Wasser

GROHE

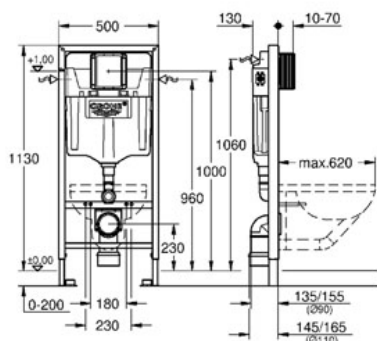

Product Description:

Rapid SL for WC

Standard Specification:

flushing cistern GD 2

with small maintenance access

1.13 m installation height

for on-the-wall installations or studded walls

powder coated steel frame, self-supporting

for dry-cladding, completely pre-assembled

with fixed connections

quick adjustment, lockable

fixing material

TÜV approved

2 WC fixing bolts

fixing device for ceramic

distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GD 2, 6 - 9 l

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation:

dual flush or start/stop or single flush

water supply from left/right or back

low noise (group I acc. to German Noise Specification)

DIN approved

insulated against condensation

½" water supply connection including integrated angle valve

and push fit flexible hose union

no tools required for the installation of the inspection shaft

incl. protection during construction phase

for vertical or horizontal use

without accessories for on-the-wall installation

Color:

□ 38528 001