


# Product Installation


## *Wall-hung Closets Type 1*




# STEP 1

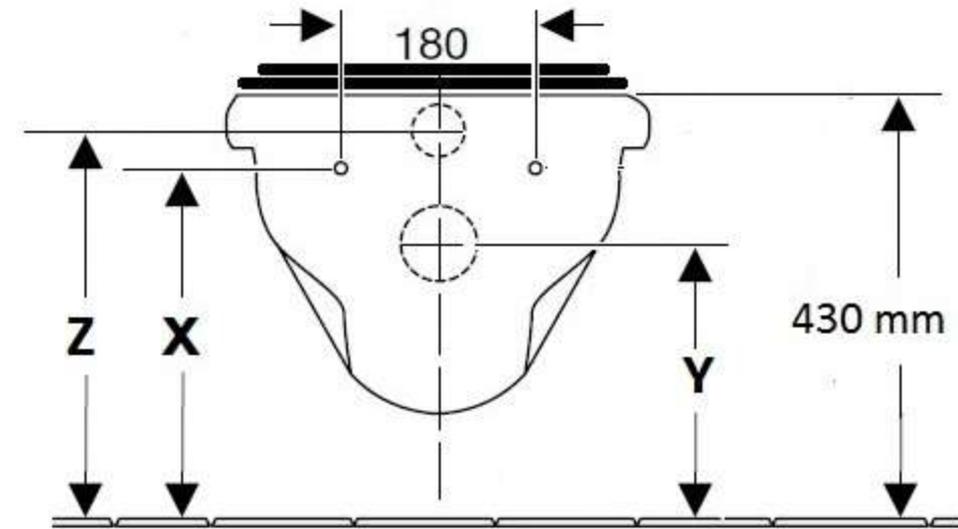

**Fix the rag-bolts in the wall at the distances as per the dimensions of the products. Follow the same procedures for the inlet and outlet holes.**

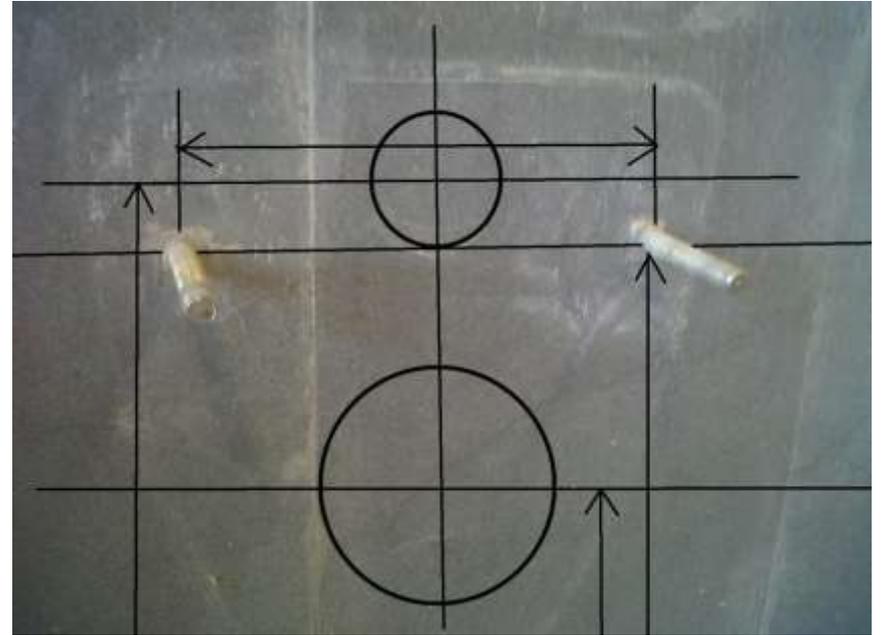

# STEP 1

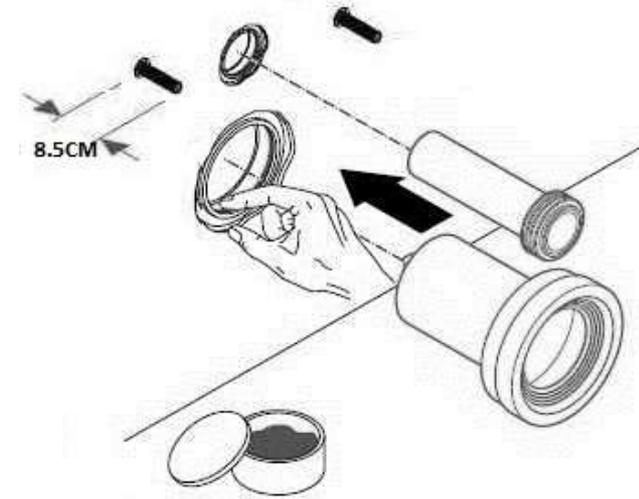

**Ensure that the rag-bolts are projecting to a distance of at least 8.5 cm from the walls. After fixing the connectors, fix the closet in the rag-bolts.**

## STEP 2



**Insert the washers and nuts into the rag-bolts as illustrated.**

## STEP 3



**Screw in washers and nuts into the rag-bolts. Tighten with spanner.**



**Installation is complete**




# Product Installation

## *Wall-hung Closets Type 2*




# Fixing accessories to be assembled

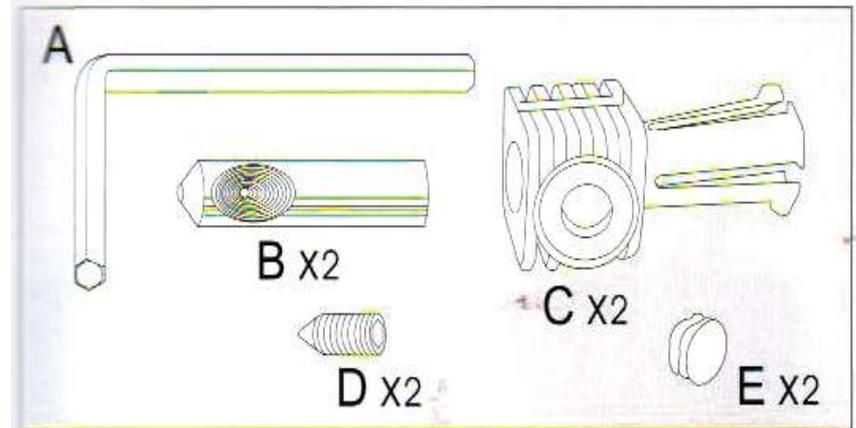


- Five accessories: Part A.B.C.D.E;


## STEP 1

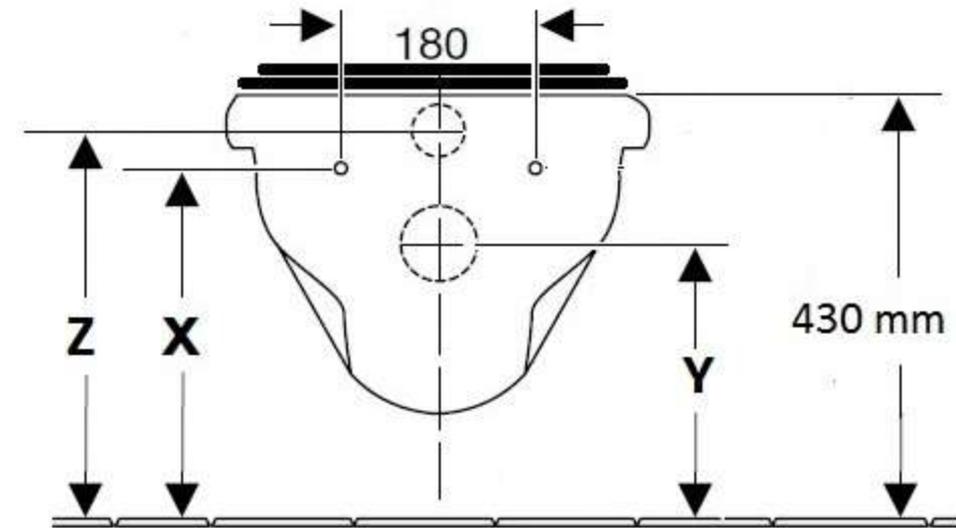

**Fix the rag-bolts in the wall at the distances as per the dimensions of the products. Follow the same procedures for the inlet and outlet holes.**

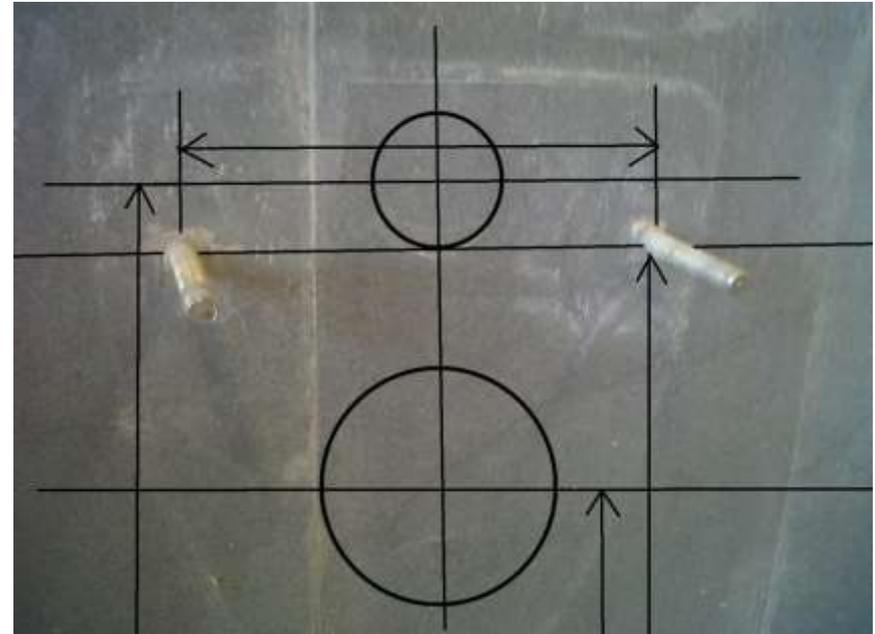


## STEP 2

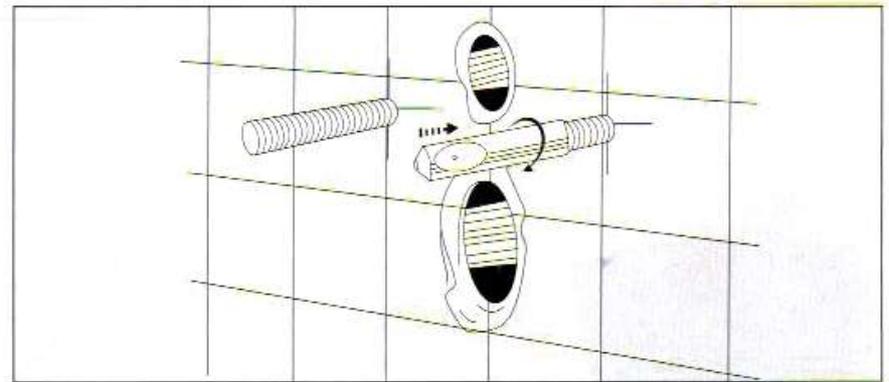


- Fix the Part B into the screw as the above picture;

# STEP 3

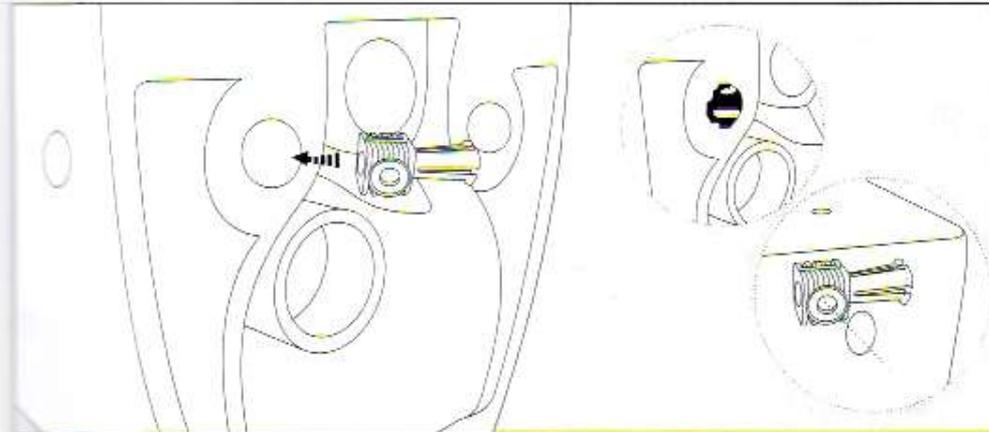



- Put Part C into the installing hole on the pan;

# STEP 3

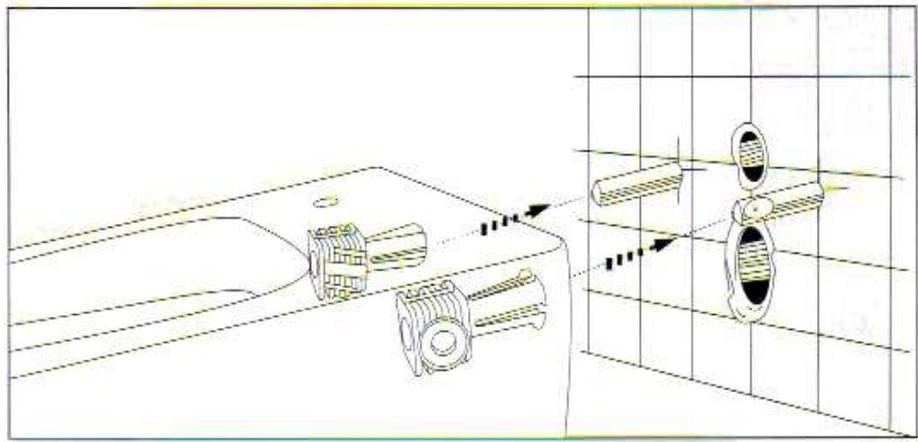


- Insert the Part C into Part B;

# STEP 3

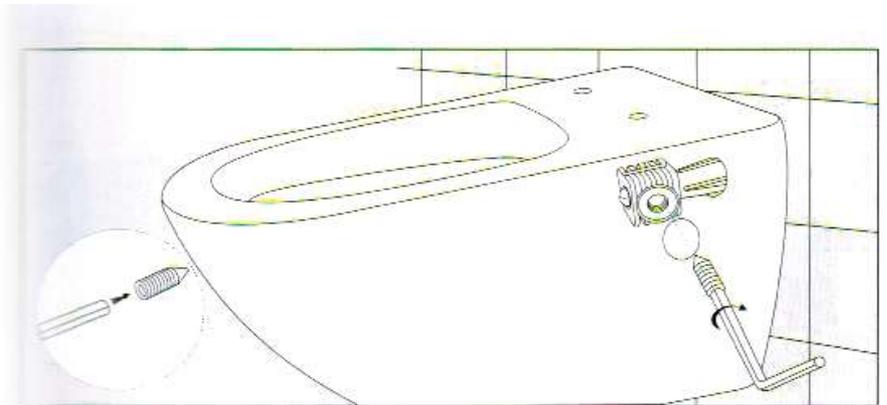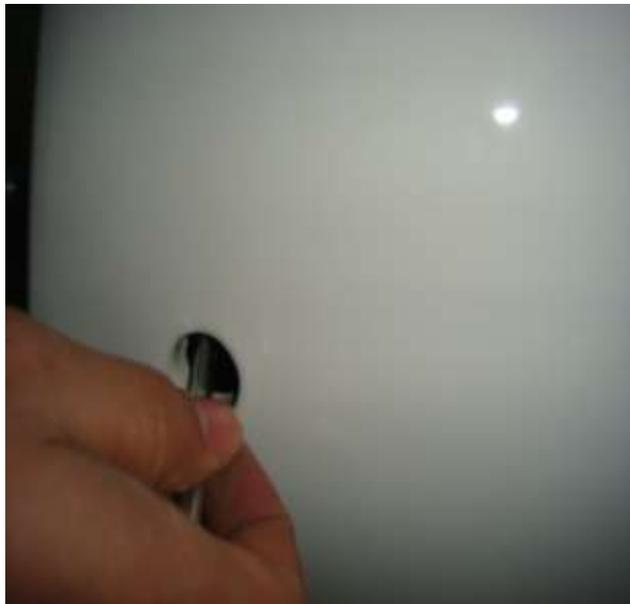

- Fix Part D into the hole on Part C by tool Part A;

# STEP 3

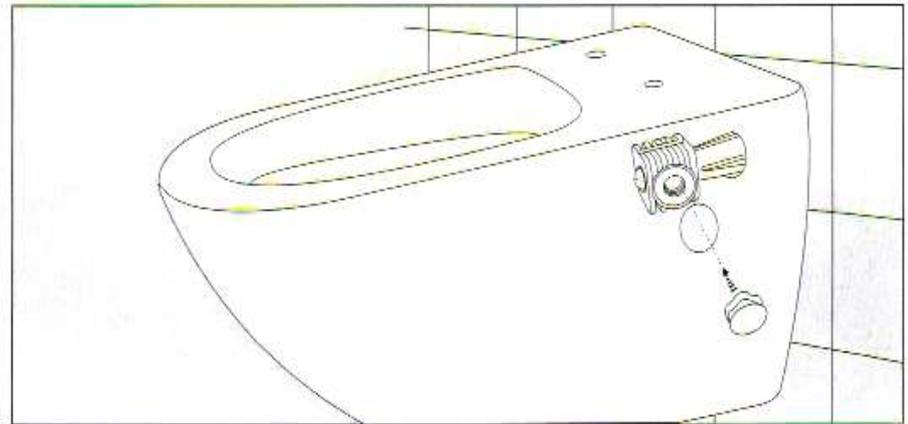

- Cover Part E on the hole of the pan